
Renaissance Swing

Item# L-GZ542PCO

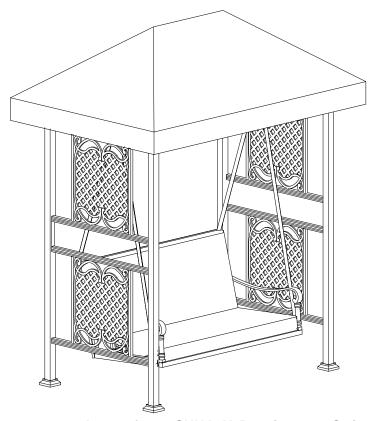

Congratulations on your purchase of our SUNJOY Renaissance Swing. Our clear, easy to follow, step-by-step instructions will guide you through the assembly process from start to finish.

WARNING:

- Keep all children and pets away from assembly area. Children and pets should be supervised when they are in the area of the Swing construction.
- Keep assembly area at least 6 feet from any obstruction such as a fence, garage, house, overhanging branches, laundry line or electrical wires.
- Some parts may contain sharp edges. When assembling and using this product, basic safety precautions should always be followed to reduce the risk of personal injury and damage to the product. Please read all instructions before assembly and use.
- Check all bolts for tightness before use. IMPORTANT check and tighten bolts often to keep them secure!

IMPORTANT

Please take time to read these instructions thoroughly and follow each step carefully for safe and easy operation. Keep this manual for future reference.


For technical assistance on assembly or replacement parts, call Sunjoy Industries at <u>1-866-578-6569</u> from 8:30AM to 5:30PM EST, or email us at <u>sams@sunjoygroup.com</u>, or visit <u>www.sunjoydirect.com</u> for assistance.


Parts List


Side Panel	А	2	
Stake Base	В	4	
Base Cover	С	4	
Cross Beam	D	2	
Middle Cross Beam	E	1	
Tilt Top Girder	F	4	
Short Girder	G	2	
Long Girder	Н	2	
Top Connection	I	1	
Back Panel	J	1	
Seat Panel	K	1	
Right Armrest	L1	1	
Left Armrest	L2	1	
Long Suspender	М	2	0
Short Suspender	N	2	
Support Hook	0	2	
Seat Cushion	Р	1	
Back Cushion	Q	1	
Canopy	R	1	


Hardware Pack 1

AA	Bolt M6x15	8 PCS	
ВВ	Flat Washer M6	34 PCS	
CC	Bolt M6x15	4 PCS	
DD	Bolt M6x35	4 PCS	\$
EE	Nut M6	4 PCS	
JJ	Bolt M6x40	2 PCS	
KK	Bolt M6x20	12 PCS	
W1	Wrench M6	1 PC	

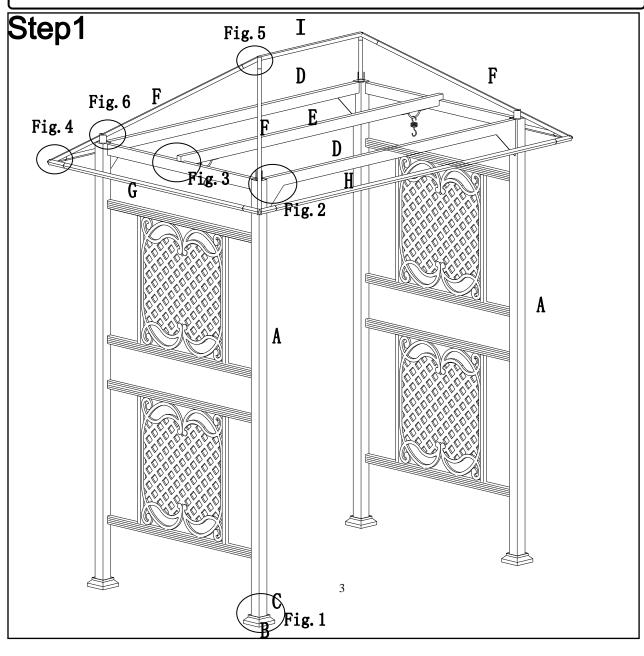









Step 1: Attach Base Cover (C) to Post of Side Panel (A).


Attach Stake Base (B) to Post of Side Panel (A); tighten with Bolts (AA) and Flat Washers (BB) (Fig.1).

Step 2: Attach Cross Beam (D) to Side Panel (A), tighten with Bolts (KK) and Flat Washer (BB) (Fig.2).

Step 3: Attach Middle Cross Beam (E) to Side Panel (A); tighten with Bolts (CC), Bolt (JJ) and Flat Washer (BB) (Fig 3).







Step 4: Insert Short Girder (G) and Long Girder (H) into the connection tubes of Tilt Top Girder (F). (Fig.4).


Step 5: Insert Tilt Top Girder (F) into Top Connection (I). (Fig.5).


Step 6: Lift the entire top combination, and place onto Side Panels (A).

Attach Tilt Top Girder (F) to Side Panel (A); tighten with Bolts (DD), Flat Washer (BB) and Nut (EE). (Fig.6).

Hardware Pack 2

ВВ	Flat Washer M6	13 PCS	
FF	Bolts M6x35	13 PCS	
GG	Bolts M10x65	4 PCS	
НН	Flat Washer M10	8 PCS	
MM	Nut M10	4 PCS	
II	Spring Washer M10	4PCS	
W2	Wrench M10	2 PCS	

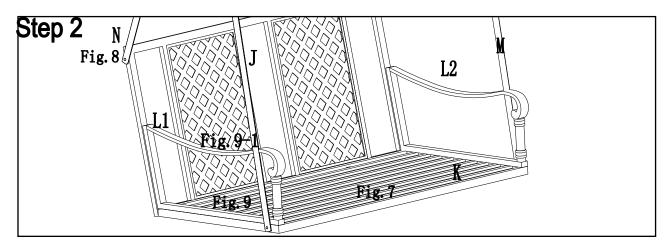

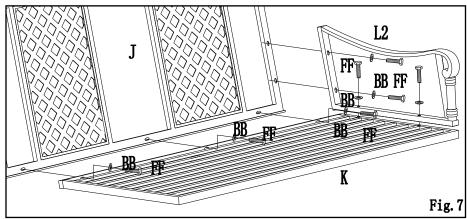

Step 7: Connect Back Panel (J), Seat Panel (K), Left Arm (L2) and Right Arm (L1) with Bolts (FF) and Flat Washers (BB). (Fig.7)

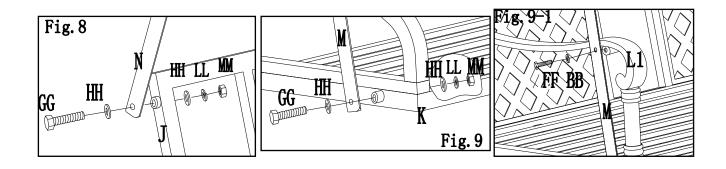


Fig.8: Lock Short Suspender (N) onto Back Panel (J) by using Bolt (GG), Flat Washer (HH), Spring Washer (LL) and Nut (MM). (Fig.8)

Fig.9: First to lock Long Suspender (M) onto Seat Panel (K) by using Bolt (GG), Flat Washer (HH), Spring Washer (LL) and Nut (MM). (Fig.9)

Fig. 9-1: Then connect Long Suspender (M) with Right Armrest (L1) and Left Armrest (L2) by using Bolt (FF) and Flat Washer (BB). (Fig. 9-1)

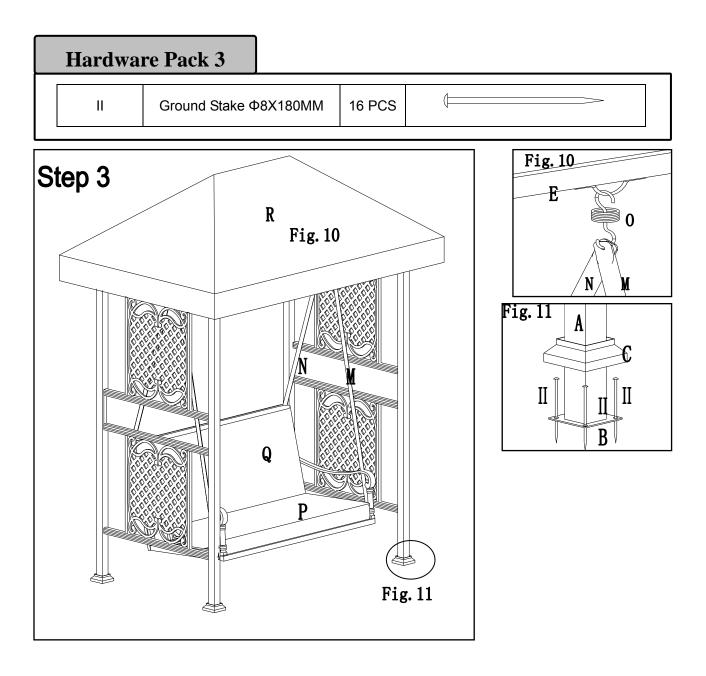


Fig.10: Hang the assembled Seat to Middle Cross Beam (E) with Support Hook (O). Put Seat Cushion (P), Back Cushion (Q) on the Seat and place Canopy (R) onto top.

Fig.11: Secure the swing into the ground using the Ground Stakes (II) (Fig 11). Assembly Completed!

Care & Maintenance

Before using, clean the Swing completely with a soft dry towel. Do not place your Swing in wet conditions where there is a risk of rust developing. When not in use, wipe free of any dirt or loose objects, wash with a mild solution of soap and water; rinse thoroughly and dry completely. Do not use strong detergent or abrasive cleaners. When not in use, store in a cool, dry location away from sunlight.

Limited Warranty:

Sunjoy Industries warrants to the original purchaser that this item is free from defects in workmanship and materials for a period of 1 year from the date of purchase, provided the item was factory-sealed at the time of purchase and is maintained with care and used only for personal, residential purposes. Should any manufacturing defect arise within this warranty period, Sunjoy Industries will repair or replace (at our option) any defective merchandise upon proof of purchase; however, transportation and delivery costs, as well as payments to a third party for assembly or disassembly of the item, remain the responsibility of the purchaser. A purchaser of an "open box," previously-returned, or "clearance" item, as well as original purchasers outside of the warranty period, may obtain replacement parts from Sunjoy Industries for products in current production, at nominal cost.

Exclusions:

Items used for commercial, contract, or other non-residential purposes, or items damaged due to acts of nature, vandalism, misuse, or improper assembly are not covered. Corrosion or rusting of hardware is not covered. Proof of purchase (dated register receipt) is required for warranty claims. Warranty is to the original purchaser and is non-transferable. Any replacement of warranted items will be in the original style and color, or a similar style and color if the original is unavailable or has been discontinued. As some states do not allow exclusions or limitations on an implied warranty, the above exclusions and limitations may not apply. This warranty gives you specific rights, and you may also have other rights, which vary from state to state.