


G7 Jogger™ Pet Stroller Instructions

Patterns vary

Parts List

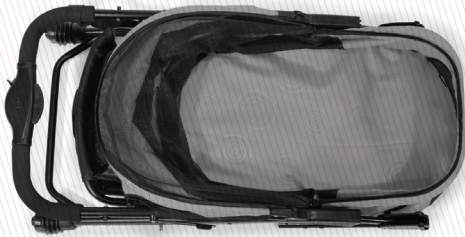

Stroller Frame



Front Wheel



Front Wheel Assembly



Parent Tray



Rear Wheels and Axle

How to assemble your new stroller

Step 1



Assemble wheel onto the front fork

1. Attach front wheel to front wheel assembly. Be sure to insert silver colored tooth on the wheel into the open groove on the front wheel fork.
2. Twist long silver colored lever and tighten by pulling lever up to lock wheel onto the fork.

Step 2



Assemble front wheel assembly to the frame

1. Attach the front wheel onto the front wheel forks
2. Insure that the Valco buttons on the fork are in correct position with the wheel
3. Push the front wheel onto the front forks until Valco buttons snap into place

Stroller assembly continued

Step 3



Attach rear wheels to axle

1. Pull silver tab on wheel while inserting center of wheel onto the axle. (See arrow on picture to the left)
2. Press firmly on wheel to ensure a tight fit.
3. Repeat 1 & 2 to insert second wheel on axle.

Step 4



Assemble rear wheel assembly to the stroller frame

1. Insert wheel assembly into both steel tubes.
2. Listen for the snap of the valco button to be sure assembly is firmly attached.
3. You can verify a secure fit by lifting up on the plastic (see arrows above) if you can see the silver colored valco buttons.

Step 5



Attach parent tray

1. Place parent tray on handle bar and align side holes on both sides of the tray (see arrows above) with knobs on steel tubing and snap into place.

Folding the stroller

1. Unzip the pet compartment and remove pet
2. Remove items from storage basket
3. Using the Smart-Fold Handle Mechanism push the red button on the underside of the mechanism
4. Next while holding the red button in, squeeze the red handle completely on the front of mechanism
5. Push the stroller handle down-ward to fold the stroller

Opening the stroller

1. Unlatch locking mechanism.
2. Lift up on handle and pull stroller open to upright position.
3. Be sure stroller frame locks into place at the hinges as seen in image #1 with white arrow.

How to care for your new stroller

- Clean Fabric with mild household soap and warm water.
- Clean Stroller frame with mild household soap and warm water.
- If wheel squeaks or rotates with difficulty, apply light oil. (e.g. WD-40, 3-in-1, or sewing machine oil)
- Regularly check stroller for loose or missing parts and tighten or replace with Gen7Pets parts.