

Gas Pizza OvenStart Guide & Safety Instructions

1 YEAR LIMITED WARRANTY





Technicians are available to assist with your product needs. For assembly assistance, technical questions, missing parts or general help, please contact us toll-free

1-833-454-0864

Mon-Fri 9 AM - 7 PM EST, CLOSED Saturday and Sunday

READ AND SAVE MANUAL FOR FUTURE REFERENCE. ASSEMBLE YOUR GRILL IMMEDIATELY.





WARNINGS & SAFETY INSTRUCTIONS

↑ DANGER

If you smell gas

- 1. Shut off gas to the pizza oven.
- 2. Extinguish any open flame.
- 3. If odor continues, keep away from the pizza oven and immediately call your gas supplier or your fire department.

Failure to follow these instructions could result in fire, explosion or burn hazard, which could cause property damage, personal injury or death.

M DANGER

- ⚠ If these instructions are ignored, there is a possibility of a hazardous fire or explosion which could result in physical injury, property damage or death.
- ⚠ It is your responsibility to assemble, operate and maintain your pizza oven properly.
- **⚠** Do not store an LP cylinder under or near this pizza oven.

- **⚠ Never operate this appliance unattended.**
- ⚠ Never operate this appliance within 25 ft (7.5 m) of any flammable liquid.
- ⚠ If a fire should occur, keep away from the appliance and immediately call your fire department. Do not attempt to extinguish an oil or a grease fire with water.

⚠ IMPORTANT

CALIFORNIA PROPOSITION 65 WARNING

- **WARNING:** This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www. P65Warnings.ca.gov
- Please read the start guide & safety Instructions carefully.
- The gas pizza oven will get hot. Do not touch the outer shell while in use.
- This gas pizza oven is for outdoor use only.
- Ensure children and pets are kept at a safe distance and supervised at all times around the gas pizza oven.

WARNINGS & SAFETY INSTRUCTIONS



THIS GAS PIZZA OVEN IS FOR OUTDOOR USE ONLY.



⚠ This instruction manual contains important information necessary for the proper assembly and safe use of the pizza oven.

⚠ Read and follow all warnings and instructions before assembling and using the pizza oven.

⚠ Follow all the warnings and instructions when using the appliance.

⚠ Keep this manual for future reference.

⚠ This pizza oven should NOT be used in a building, garage or any other enclosed area.

⚠ The use of alcohol, prescription or non-prescription drugs may impair an individual's ability to properly assemble or safely operate this pizza oven.

⚠ DO NOT leave the pizza oven unattended. Keep children and pets away from the pizza oven at all times.

⚠ DO NOT use the pizza oven in high wind.

This pizza oven must be used with liquid propane gas only. The conversion or attempted use of natural gas in a liquid propane grill is dangerous and will void your warranty.

⚠ DO NOT attempt to attach this pizza oven to the selfcontained propane system of a camper, trailer, motor home or house.

⚠ This appliance is not intended for and should never be used as a heater.

⚠ DO NOT use gasoline, kerosene or alcohol for lighting. The LP-gas cylinder must be constructed and marked in accordance with the specifications for propane gas cylinder of the U.S. Department of Transportation (DOT).

⚠ DO NOT move pizza oven when in use.

⚠ DO NOT use the pizza oven unless a leak test is performed on all connections.

⚠ DO NOT alter the pizza oven in any manner.

⚠ DO NOT operate the pizza oven if there is gas leak present.

The use and installation of this product must conform to local codes. In the absence of local codes, use the National Fuel Gas Code: ANSI Z223.1/NFPA54, Storage and Handling of Liquefied Petroleum Gases, ANSI.NFPA 58 or Natural Gas and Propane Installation Code, CSA C149.1; Propane Storage and Handling, CSA B149.2.

⚠ This pizza oven is not intended to be installed in or on a boat or recreational vehicle.

⚠ Locate the pizza oven away from any combustible or noncombustible materials or construction by at least 24 inches (61cm) from the back and sides.

⚠ When cooking, have a type BC or ABC fire extinguisher readily available. In the event of a fire do not attempt to extinguish with water. Immediately call the fire department.

This pizza oven shall not be used under overhead unprotected combustible construction.

⚠ Keep the fuel supply hose away from any heated surfaces.

⚠ This appliance is not intended for commercial use.

TABLE OF CONTENTS

WARNINGS & SAFETY INSTRUCTIONS	3
EXPLODED DIAGRAM & PARTS LIST	7
SETUP	8
POSITIONING THE PIZZA OVEN	9
LP GAS CYLINDER	10
QCC1 GAS REGULATOR	11
REGULATOR FLOW LIMITING RESET	13
LEAK TEST	14
LIGHTING INSTRUCTIONS	15
TIPS/USING YOUR MEMBER'S MARK® PIZZA OVEN	17

19
21
23
25
27
29
30
32
33
35

CARBON MONOXIDE

Carbon Monoxide is a highly poisonous gas which can be produced when the device isn't recieving enough ventilation. We therefore recommend using the pizza oven in a well ventilated area away from direct wind and to never cover the oven mouth.

It is difficult to know if your device is producing Carbon Monoxide as it is an odorless and colorless gas. It can, however cause these symptoms when you are exposed to it:

- · Tightness across the forehead
- Headache
- Weakness

- Dizziness
- Nausea
- Vomiting

- Coma, intermittent convulsions
- Depressed heart action, slowed respiration


⚠ If the exposure has been severe it may cause death.

WARNING - HOT SURFACE



WARNING: HOT SURFACE



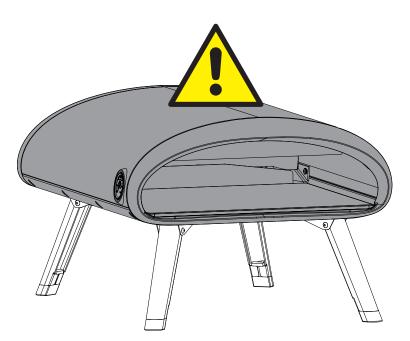


⚠ CAUTION⚠

- EXTREMELY HOT SURFACE, DO NOT TOUCH WHEN PIZZA OVEN IS IN USE.
- SHADED AREAS BECOME EXTREMELY **HOT WHEN IN USE.**
- ALWAYS WEAR PROTECTIVE HEAT **RESISTANT GLOVES TO AVOID BURNS.**

EXPLODED DIAGRAM & PARTS LIST

EXPLODED PARTS

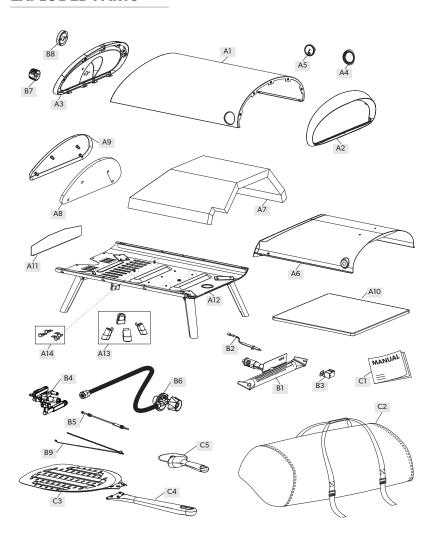

PARTS LISTS

G15001-BLACK

ITEM NO.	QTY.	DESCRIPTION	PART NO.
A1	1	Top Panel	G150-0001-C1
A2	1	Aluminum Front Cap	G150-0002-C1
А3	1	Rear Panel	G150-0100-C1

G15002-RED

ITEM NO.	QTY.	DESCRIPTION-RED	PART NO.
Al	1	Top Panel	G150-0001-C2
A2	1	Aluminum Front Cap	G150-0002-C2
А3	1	Rear Panel	G150-0100-C2

ITEM NO.	QTY.	DESCRIPTION	PART NO.
A4	1	Temperature gauge bezel	G150-0003-C1
A5	1	Temperature gauge	G150-0004-C1
A6	1	Inner wall	G150-0200-C1
A7	1	Insulation a	G150-0012-C1
A8	1	Insulation b	G150-0011-C1
A9	1	Rear baffle plate	G150-0010-C1
A10	1	Pizza stone	G150-0021-C1
A11	1	Heat shield	G150-0016-C1
A12	1	Bottom panel assembly with legs	G150-0400-C1
A13	4	Feet	G150-0019-C1
A14	4	Match Holder Clip	G608-0041-C1
B1	1	Main burner assembly	G150-0300-C1
B2	1	Electrode set	G150-0014-C1
В3	1	Collector box	G150-0015-C1
В4	1	Main burner valve	G150-0005-C1
B5	1	Thermocouple	G150-0006-C1
В6	1	Regulator	G150-0007-C1
В7	1	Control knob	G150-0009-C1
B8	1	Knob bezel	G150-0008-C1
В9	1	Match holder	G150-0022-C1
C1	1	Assembly and user manual	G150-010801-C1
C2	1	Carry cover	G150-0023-C1
C3	1	Pizza peel_head	G150-0025-C1
C4	1	Pizza peel_handle	G150-0026-C1
C5	1	Rolling cutter	G150-0024-C1

SETUP



READ ALL WARNINGS AND SAFETY INSTRUCTIONS OUTLINED IN THIS MANUAL BEFORE GETTING STARTED.

STEP 1

Position the Member's Mark gas pizza oven on level, stable, stainless steel, wood, stone or concrete surface.

Unfold the pizza oven legs and check that the unit is stable before continuing.

⚠ Ensure the control knob is set to OFF/"0".

STEP 2


Place the pizza stone (A10) into the pizza oven.

STEP 3

Assemble the pizza peel.



Screwdriver is required

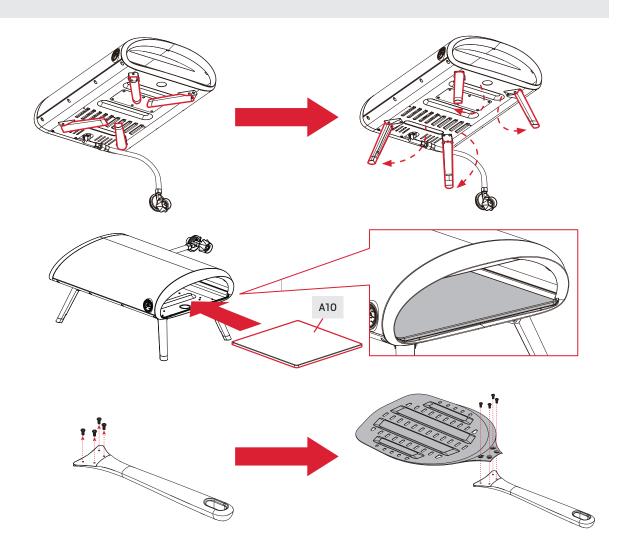


POSITIONING THE PIZZA OVEN


NOTE: The use and installation of this product must conform to local codes. In the absence of local codes, use the National Fuel Gas Code: ANSI Z223.1/NFPA54, Storage and Handling of Liquified Petroleum Gases, ANSI.NFPA 58 or Natural Gas and Propane Installation Code, CSA B149.1; Propane Storage and Handling, CSA B149.2.

- NEVER use this pizza oven inside any building, garage, shed or breezeway, or inside any boat, trailer or recreational vehicle, to prevent possible fire and to prevent the possibility of carbon monoxide poisoning or asphyxiation.
- 2. **ALWAYS** place the pizza oven on a hard and level surface far away from combustible materials and structures.
- 3. **DO NOT** use this pizza oven under an overhead combustible surface or covered area (e.g., awning, umbrella, porches or gazebo).
- 4. **ALWAYS** place the pizza oven away from any combustible and non-combustible material or construction by at least **24 inches (61cm)** from back and **24 inches (61cm)** from side.
- 5. **NEVER** store or use gasoline or other flammable or volatile substances in the vicinity of this pizza oven or in the vicinity of any other heat-generating appliance, because of the danger of starting a fire.
- 6. **DO NOT** obstruct the flow of combustion and ventilation.

⚠ CAUTION: DO NOT touch any hot pizza oven parts.

ATTENTION: Use protective gloves to handle any parts that might become hot during use.

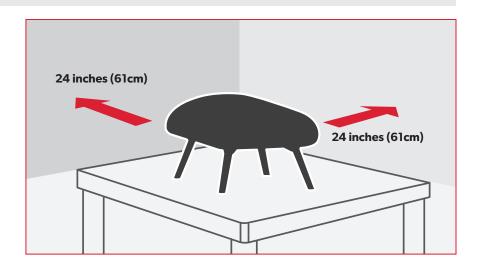

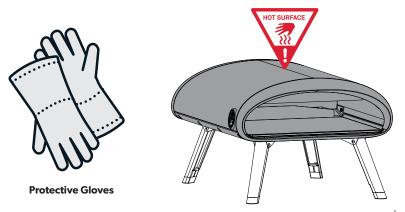

LP GAS CYLINDER

LP GAS CYLINDER - 1 WARNINGS

⚠ LP gas supply cylinder must be constructed and marked in accordance with the specifications for LP gas cylinders of the Canadian Standard for Cylinders, Spheres and Tubes for Transportation of Dangerous Goods and Commission, CAN/CSA-B339; or LP gas Cylinders of the U.S. Department of Transportation (D.O.T), as applicable.

Always keep the 20 lbs propane tank in upright position.

Keep away from the LP cylinder and the gas hose when in use, to prevent tripping or tipping over the LP cylinder and Pizza Oven.

⚠ If the pizza oven is not in use, the LP cylinder must be closed.

Arr Propane cylinder must not exceed 20 lb (9.1 kg) capacity, approximately 18½ inches (46.35 cm) high and 12½ inches (31.1 cm) in diameter. The LPG capacity is approximately 47 lb 10 oz (21.6 kg) water capacity or as stated by the manufacturer.

⚠ Shut-off valve with a correct cylinder valve output as specified in current standards ANSI Z21.89-2017 • CSA 1.18-2017 Outdoor Cooking Gas Appliances.

↑ Type-1 mating (CGA 810) compatible with this pizza oven. The type 1 valve is easily recognized by the large ACME external threads on the outside of the valve.

⚠ Safety relief valve with direct connection to the vapor space of the cylinder.

⚠ UL listed Overfill Protection Device (OPD). This OPD safety feature is identified by a unique triangular hand wheel. Use only LP cylinders equipped with this type of valve.

⚠ A device for vapor withdrawal.

⚠ A collar to protect the LP cylinder shut-off valve.

A ring on the bottom of the LP cylinder to secure it to the support assembly.

£ Equipped with a dust cap for the cylinder valve outlet, which must be used whenever the cylinder is not in use.

⚠ Cylinders must have a D.O.T. certification (A) and a testing date (B) that is within five years of current use.


⚠ Do not store a spare LP gas cylinder near or under this appliance.

Never fill the cylinder beyond 80% full and if these warning instructions are not followed excatly, a fire causing death or serious injury may occur.

QCC1 GAS REGULATOR

PRESSURE REGULATOR

This Pizza Oven is designed to operate on LP gas at a pressure of 2.74 kPa (11" water column). A regulator preset to this pressure is supplied with your Pizza Oven. Replacement regulators must be as specified by Member's Mark (UL-listed Type 1 (CGA 810) Cylinder connection device as described in the latest edition of ANSI Z21.81).

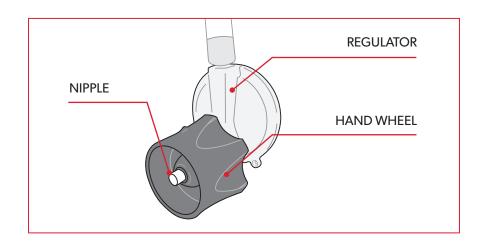

SAFETY FEATURES


The LP gas cylinder equipped with the new QCC-1 Quick Closing Coupling system, which includes the following safety features required by the Canadian Standards Steering Committee and the American National Standards Institute ANSI):


- Gas will not flow until a positive connection has been made.
- A thermal element built into the regulator will shut the flow of gas between 240° to 300°F (115° to 149°C).
- When activated, a Flow Limiting Device will restrict the flow of gas to 10 cubic feet per hour. See Regulator Flow Limiting Reset Device Activated (page 13).


QCC1 GAS REGULATOR

CONNECTING THE LP CYLINDER

- 1. Position the pizza oven on an elevated, stable surface with the tank positioned beside it, on the ground as shown (see image A).
- 2. The burner control knob must be OFF/"0".
- 3. The LP cylinder must be CLOSED.
- 4. Connect the Pizza Oven hose and regulator to the LP cylinder.

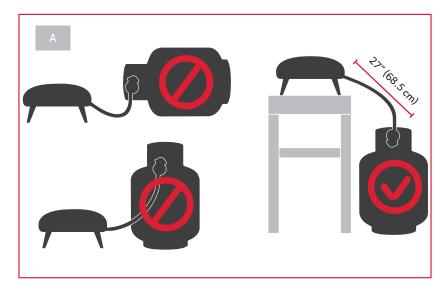

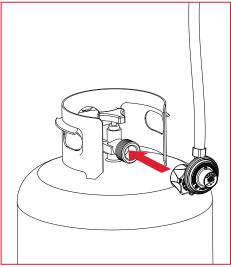

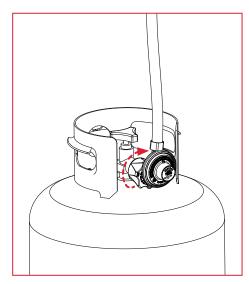

REGULATOR FLOW LIMITING RESET

PRESSURE REGULATOR

If you are experiencing any of the following performance issues with your Member's Mark Gas Pizza Oven,

- Burners not getting hot enough.
- Low or incomplete burner flames.
- Low gas pressure.
- Burners not staying lit.

FOLLOW THESE REGULATOR RESET INSTRUCTIONS:

- 1. Ensure the control knob is "0" / OFF.
- 2. Ensure the LP cylinder valve is "CLOSED".
- 3. Disconnect the regulator from the 20 lb LP cylinder.
- Push in and turn the control knob counterclockwise to the "MAX" position. Let stand for 1-2 minutes, allowing all excess gas in the valve to dissipate.
- 5. Push in and turn the control knob clockwise, back to the "0" / OFF position.

- 6. Reconnect the regulator to the LP cylinder, as shown on page 12. Be careful not to cross thread the connection. Hand-tighten only.
- 7. Check all connections. Perform a leak test. See Page 14.
- 8. Slowly 'open' the LP cylinder and wait 5 seconds for the pressure to stabilize.
- Push in and slowly turn the control knob counterclockwise to 'MAX'
 position. A 'click' will be heard when the ignition is activated. Continue
 to HOLD the control knob for 5 SECONDS after ignition, before
 releasing the knob.

NOTE: IF IGNITION FAILS, TURN THE CONTROL KNOB BACK TO "0"/OFF AND REPEAT STEP 9, OR FOLLOW THE MATCH LIGHTING INSTRUCTIONS ON PAGE 15.

Avoid activating the flow limiting feature by following the proper lighting and shut down procedures and leak testing the system regularly.

LEAK TEST


LEAK TEST - BEFORE YOU BEGIN


Before each use, clean and inspect the hose and check all the gas connections. If there is evidence of abrasion, wear, cuts, or leaks, the hose must be replaced prior to the appliance being put into operation.

For leak test using the procedure listed below.

- 1. Make a solution of one part liquid detergent and one part water. You will need a spray bottle and a brush or rag to apply the solution to the fittings.
- 2. The Pizza Oven control knob must be set to OFF/"0".
- 3. Ensure that the regulator is connected to the LP cylinder. Hand tighten only.
- 4. Spray the gas valve, hose and regulator and the top of the LP cylinder to check for leaks (see image A).
- 5. Slowly open the LP cylinder counterclockwise. If bubbles are visible (see image B), immediately turn the gas supply OFF, tighten fittings and test again.
- 6. If no bubbles appear, proceed with lighting instructions.

MARNING: If the smell of gas is detected at any time, immediately set the control knob to OFF/"0" and close the LP cylinder and perform a leak test.

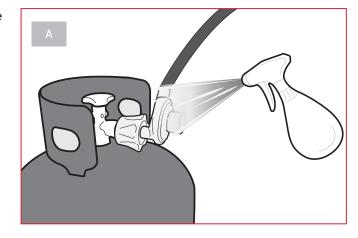

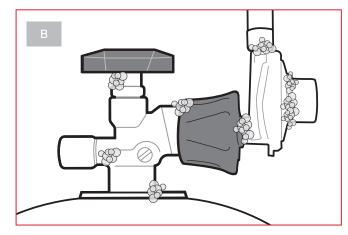

LIGHTING INSTRUCTIONS

BEFORE LIGHTING

MARNING: Do not look directly into the front of the oven while lighting, as flames may escape from the oven opening.


- 1. The burner control knob must be in the OFF/"0" position (see image A).
- 2. The LP cylinder must be 'closed.'

LIGHTING

- 3. Slowly open LP cylinder and wait 30 seconds for pressure to stabilize.
- 4. **Push in**, slowly turn **counter clockwise to 'MAX' position** (see image B). A 'click' will be heard when the ignition is activated. **Continue to HOLD the control knob for 5 SECONDS after ignition before releasing the knob.**
- 5. If the burner does not ignite, turn the control knob to the '0'/OFF position, before repeating step 4. If the burner will not light after several attempts, follow the Match Lighting Instructions.

MATCH LIGHTING

- 1. The burner control knob must be in the OFF/"0" position, and the LP cylinder open.
- 2. Locate the extendable match lighting tool. Extend the tool and position a lit match into the lighting tool (B9).
- 3. Push in and turn the burner control knob to the 'MAX' position.
- 4. Insert the match lighting tool through the front of the oven, to the burner, until the burner is lit (see image C).

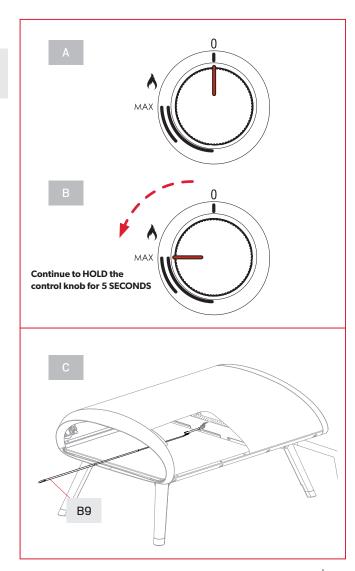


LIGHTING INSTRUCTIONS

SEASONING THE PIZZA OVEN

- 1. Run the pizza oven for **20 minutes** on **'MAX'**, before using.
- 2. After seasoning, ensure the temperature is around **750°F (400°C)** before launching the first pizza into the center of the pizza stone.


⚠ IMPORTANT: Rotate the pizza a 1/4 turn every 15 seconds to avoid burning. DO NOT leave the pizza oven unattended when in use.

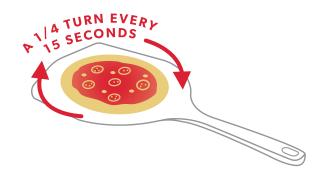

SHUT DOWN PROCEDURE

- 1. Turn the burner control knob (clockwise) to '0'/OFF (See image A).
- 2. Close (clockwise) the LP cylinder (See image B).
- 3. Disconnect the hose and regulator from the LP cylinder before storing.

 \triangle CAUTION: The pizza oven will **REMAIN HOT** for some time. **DO NOT** attempt to relocate or store the pizza oven until it has **COMPLETELY COOLED**. \triangle

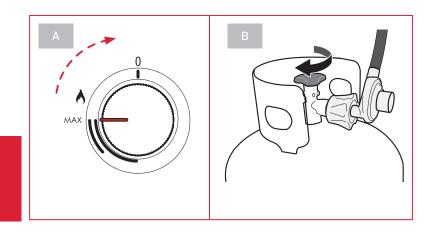

TIPS/USING YOUR MEMBER'S MARK® PIZZA OVEN

TIPS FOR MAKING PIZZA DOUGH


- Your flour of choice is critical. '00' flour is what is used in Italy and will yield the best crust possible. If unavailable, you can use a mix of bread flour and semolina flour.
- Semolina flour can also be used just for the pizza launching process. It doesn't
 char as easily as all-purpose flour and a small amount of semolina on your pizza
 peel will allow pizza to release easily from the peel without leaving a residue.
- A digital scale will come in handy to keep your recipe consistent and your dough ball size consistent.
- When bulk fermenting you need an airtight container for best results.
- Always use active dry yeast.
- The best dough will require at least 2-3 days Fermentation.
- Dough is easiest to stretch and slide off the peel at room temperature. If you are cold proofing dough, leave it for at least 3-5 hours at room temperature before beginning to stretch.

TIPS FOR BEST RESULTS

- Preheat the oven for 20 minutes, before launching your first pizza.
- Before you begin have everything ready, including; dough balls, semolina flour, toppings, trays, pizza peel and pizza cutter.
- Adding a pizza to the pizza stone will temporarily lower the temperature of the oven. Always ensure pizza dough is at room temperature, not cold, before beginning.
- ATTENTION: Avoid flare-up fires, do not allow the pizza to touch the rear heat shield.
- Use the temperature gauge on the side of the oven as a reference only, as it will
 not provide a precise readout of the pizza stone. Alternatively, an infrared digital
 thermometer can be used for more exact temperatures.

TIPS FOR BUILDING YOUR PIZZA AND LAUNCHING YOUR PIZZA

- Always lightly flour your pizza peel with '00' flour and Semolina flour before positioning your pizza dough.
- Place dough on the pizza peel and give it a light shake. Make sure it can slide back and forth like a hockey puck.
- Ensure that there are no holes in the dough as the sauce can create a 'glue' effect between the dough and pizza peel.
- Do not leave your dough on the peel for a long time before cooking.
- Before adding your toppings, give your peel a shake to ensure that the dough is moving freely. If not, pick up the dough and add more flour to the peel.
- Avoid putting toppings and sauce too close to the edge. You want to avoid sauce and toppings from falling off in the oven when launching your pizza.
- Keep your toppings light. Heavy ingredients will weigh down your dough and make it harder to lift off of the peel or launch.
- Work quickly when adding toppings. The longer it takes to dress the pizza the more likely the sauce can seep through the dough and onto your peel creating problems for launching.
- While you get accustomed to the high pizza oven temperatures, use the control knob to adjust temperatures down slightly until you are comfortable.
- Pizzas will take 60 seconds or less to finish but must be turned frequently to avoid burning the crust.






72 HOUR PIZZA DOUGH

72HOUR PIZZA DOUGH

YIELD: 6 pizzas (Roughly 10" diameter)

INGREDIENTS:

- 800g Bread flour (If unavailable, you can use a mix of bread flour and semolina flour)
- 2.84g coarse salt
- 1.42g dry active yeast
- 350ml water, room temperature





- 1. Combine flour, salt, yeast in the bowl of a stand mixer using the dough hook attachment or combine in a regular mixing bowl.
- 2. Slowly, stir in water to combine.
- 3. Stop mixing and let stand for 30 minutes. Cover the bowl loosely with a towel.
- 4. Knead for 7-10 minutes on medium speed in a mixer (or 10-12 minutes by hand, until dough is smooth and elastic).
- 5. Remove dough from mixing bowl, and form into a tight ball on your counter top. Don't use any flour during this step.
- 6. Place dough ball in a container with an airtight lid, or seal the container with plastic wrap. Make sure the bowl is large enough to allow the dough to double in size.

- 7. Place container in fridge for 24 hrs.
- 8. After 24 hrs. Remove the dough and portion to 250g each (Deli containers are handy here, otherwise use small bowls).
- 9. Place back into the fridge for another 48hrs.
- 10. Remove the dough from the fridge 2 hours before you want to bake your pizza's, and let the dough sit at room temperature.
- 11. Cover loosely on the counter top and allow to rise and warm before shaping your pizzas on a floured surface. Use Semolina flour, as it does not char as easily.



SAME DAY DOUGH

SAME DAY PIZZA DOUGH

YIELD: 3 pizzas (Roughly 10" diameter)

INGREDIENTS:

- 500g "00" flour (If unavailable, you can use a mix of bread flour and semolina flour)
- 3g coarse salt
- 3g dry active yeast
- 300ml water, room temperature





- 1. Mix the dough in a stand mixer with dough hook attachment, by hand or in a bread machine.
- 2. If you are using a stand mixer, mix it slowly for two minutes, faster for 5 minutes, and slow again for 2 minutes.
- 3. Cover the dough and let it rise for 11/2 2 hours, or until double.
- 4. Punch it down and push out the air bubbles.
- 5. Form the dough into a large ball, then cut it into three 275g equal pieces.



PIZZA SAUCE

PIZZA SAUCE

YIELD: 4 - 5 Pizzas

INGREDIENTS:

- 1 x 794g (28 ounces) can of San Marzano tomatoes or other high-quality brand tomatoes or use 2 pounds of sun-ripened rosa plum tomatoes
- 30ml Extra virgin olive oil
- 2.5ml or more to taste of sea salt or coarse salt

- 22ml of dried oregano
- 3-4 cloves minced garlic
- 4 fresh leaves of basil
- A pinch of red pepper flakes for heat






METHOD

- 1. In a bowl, crush the tomatoes by hand.
- 2. Add olive oil to a pot and heat at med-low temperature for 10-15 seconds.
- 3. Add the minced garlic to simmering olive oil. Continue to stir until fragrant.
- 4. Add the oregano, tomatoes, and pepper flakes (for more heat).
- 5. Simmer for 5-7 minutes and remove from heat.
- 6. Chop the basil and add to the sauce with desired amount of salt.
- 7. Stir and place into a fridge to cool at room temperature.

TIPS

Pizza sauce should be lightly coated in the center and NOT on the edges of the pizza.

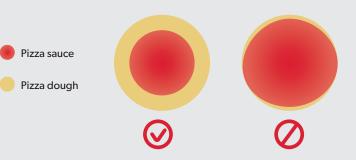




CLASSIC MARGHERITA WITH OYSTER MUSHROOMS (VEGAN)

CLASSIC MARGHERITA WITH OYSTER MUSHROOMS (VEGAN)

YIELD: 1 Pizza

INGREDIENTS:

- 250g Pizza dough
- 45ml pizza sauce
- 1C grated vegan mozzarella
- 50g oyster mushrooms
- 4-5 basil leaves





- 1. Bring dough to room temperature.
- 2. Remove the stem from the mushrooms, and slice them in $\frac{1}{2}$ " pieces.
- 3. By hand, work the dough to a diameter of 10", leaving a small rise on the edge for crust.
- 4. Slide the pizza to the pizza peel.
- 5. Pour sauce onto the centre of the dough, using a spoon to spread in circles to the crust.
- 6. Spread the mozzarella, and mushrooms around the pizza.
- 7. Slide the pizza off the peel into the oven, making sure to rotate regularly.
- 8. Once finished, remove and add basil leaves.



ROASTED CHICKEN, SMOKED CHEDDAR, CARAMELIZED ONIONS

ROASTED CHICKEN, SMOKED CHEDDAR, CARAMELIZED ONIONS

YIELD: 1 Pizza

INGREDIENTS:

- 250g Pizza dough
- 45ml pizza sauce
- 1 roasted chicken thigh, pulled in larger pieces
- ¼ C shredded smoked cheddar
- ½ C caramelized onions
- Black pepper (optional)





- 1. Bring dough to room temperature.
- 2. By hand, work the dough to a diameter of 10", leaving a small rise on the edge for crust.
- 3. Slide the pizza to the pizza peel.
- 4. Pour sauce onto the centre of the dough, using a spoon to spread in circles to the crust.
- 5. Spread smoked cheddar and chicken.
- 6. Slide the pizza off the peel into the oven, making sure to rotate regularly.
- 7. Once finished, remove and add caramelized onions and cracked black pepper (Tips: Use a fork to distribute onions).



HAM, PINEAPPLE, MOZZARELLA, SPINACH


HAM, PINEAPPLE, MOZZARELLA, SPINACH

YIELD: 1 Pizza

INGREDIENTS:

- 250g Pizza dough
- 45ml pizza sauce
- ¼ C chopped pineapple
- ½ C mozzarella
- 7-8 baby spinach leaves, chopped

 1 slice Canadian bacon (or ham), cooked and sliced into bite sized pieces





- 1. Bring dough to room temperature.
- 2. By hand, work the dough to a diameter of 10", leaving a small rise on the edge for crust.
- 3. Slide the pizza to the pizza peel.
- 4. Pour sauce onto the centre of the dough, using a spoon to spread in circles to the crust.
- 5. Spread mozzarella, ham, and pineapple onto the pizza.
- 6. Slide the pizza off the peel into the oven, making sure to rotate regularly.
- 7. Once finished, remove and add chopped spinach leaves.

CARE & MAINTENANCE

INTERIOR SURFACES

 Run the oven on 'MAX' temperature for 15 minutes to burn off excess food.

MARNING: The pizza oven must be cooled before wiping down the interior with a paper towel.

CARING FOR THE PIZZA STONE

- Avoid extreme temperature change to the stone.
- **DO NOT** place frozen foods on the stone.
- The stone is fragile and can break if bumped or dropped.
- The stone is very hot during use and stays hot for a long time after use.
- **DO NOT** cool the stone with water when the stone is hot.
- After cleaning the stone with water, the stone must be dried thoroughly before use.

EXTERIOR SURFACES

 The exterior surfaces can be wiped down with a damp cloth and dry immediately.

MARNING: The pizza oven must be cooled before cleaning the exterior surfaces.

PIZZA STONE CLEANING STEPS

- 1. To remove baked on soot or baked on food, turn the pizza stone over and preheat the pizza oven on 'MAX' to burn-off.
- 2. Once completely cool, flip the pizza stone for the next use. The elevated temperatures inside the pizza oven will clean the underside of the pizza stone.
- 3. When cooled, use a brush or scraper to clean the pizza stone.
- 4. You can also wash the pizza stone using warm, soapy water. Always dry thoroughly before returning to the pizza oven.

★ WARNING: The pizza stone is NOT DISHWASHER SAFE.

CARE & MAINTENANCE

MARNING: FLASHBACK FIRE

Spiders and insects can nest inside the burners of the pizza oven and disrupt gas flow. This dangerous condition could cause a fire behind the rear panel, thereby damaging the pizza oven and making it unsafe for operation. Inspect the pizza oven at least twice a year or immediately after any of the following conditions occur:


- If you smell gas in conjunction with burner flames appearing yellow.
- If your control knob has melted.
- If the Pizza Oven does not reach temperature.
- If the Pizza Oven heats unevenly.
- If the burner makes popping noises.

WARNING: BEFORE ATTEMPTING TO REMOVE ANY PARTS, PLEASE CONTACT CUSTOMER CARE HOTLINE FOR INSTRUCTIONS: 1-833-454-0864

CLEANING THE BURNER VENTURI TUBE


A spider's web inside of the burner venturi tube can block gas flow and can even cause a fire at the gas control valve. Such a fire can cause operator injury and severe damage to the pizza oven. To prevent insect related problems, inspect the venturi tube screen cover regularly and remove any spider webs of debris.

CAUTION: When repositioning the Burner, it is critical that the burner engages the gas valve, before reassembling the burner hardware.

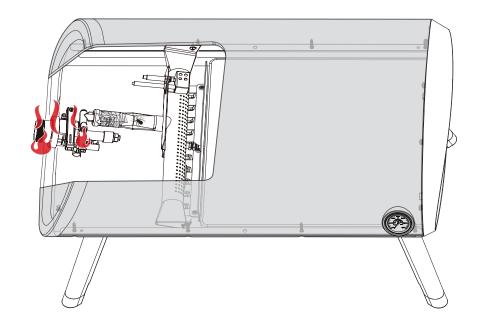







STORAGE

STORAGE

Perform the following tasks prior to storing the pizza oven for the season.


- Do not leave in humid, moist, or damp conditions, over a lengthy period.
- Always store the pizza oven indoors. The propane cylinder must be disconnected and store outdoors in a well ventilated area.
- Use the cover provided to protect the pizza oven.

Please note; covering the pizza oven will protect it from the
effects of snow, rain, animals and more, but will not protect
against moisture damage, condensation, and other corrosive
agents. Store indoors when possible and when storing for
extended periods of time.

MARNING: If you are located near the ocean or a body of water, store your Member's Mark pizza oven indoors.

Regular care of your pizza oven will help keep it operating properly.

⚠ NOTE: All maintenance should be done only when the pizza oven is cool and with the fuel supply turned off.

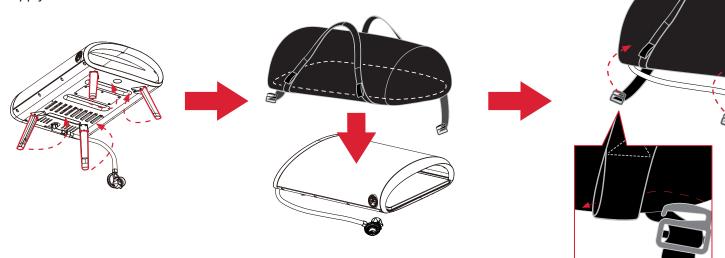

TROUBLESHOOTING

PROBLEM	POSSIBLE CAUSE	PREVENTION / SOLUTION
BURNER WILL NOT LIGHT	 Low or out of propane. Regulator flow limiting device (FLD)activated - due to a poor connection, improper lighting procedure, a poor connection or a leak. Flame safety device (FSD) has been activated. Electrode failure. Burner not properly seated on valve assembly. 	 Check propane level. Refill tank if low or out of propane. Check all connections. Follow the regulator reset instructions on page 13, and perform a leak test, see instructions on page 14. Follow regulator reset instructions on page 13 to restart the system. Replace electrode or follow the match lighting procedure. Re-engage burner and valve.
SUDDEN DROP IN GAS FLOW	Low or out of propane. Regulator flow limiting device (FLD) activated - due to improper lighting. procedure or a gas leak.	 Check propane level. Refill tank if low or out of propane. Shut down and perform a leak test, see instructions on page 14. Perform a regulator reset before attempting to relight, see instructions on page 13.
PIZZA OVEN KEEPS SHUTTING DOWN/ FLAME BLOWS OUT/ DIFFICULTY LIGHTING PIZZA OVEN	 Improper lighting procedure. The Control knob was not held down long enough during lighting. Flame safety device (FSD) activated. The FSD is a part of the gas valve that ensures that the fuel supply to the pizza oven is cut off automatically and immediately if for any reason the flame goes out or becomes unstable. Regulator flow limiting device (FLD) activated - due to improper lighting procedure, a poor connectoin or a leak. Low or out of propane. High or gusting winds. 	 Turn the control knob 'OFF' and follow proper lighting procedure. When lighting, you must push in and turn the control knob very slowly from OFF to the MAX position, and keep the knob pressed in for at least 5 seconds after igntion. This can take a few attempts. Follow the regulator reset instructions on page 13, and perform a leak test, instructions on page 14. Check all connections. Follow the regulator reset Instructions on page 13, and perform a leak test, instructions on page 14. Check propane level. Refill tank if low or out of propane. Relocate the pizza oven to a less windy location, or position the pizza oven so that wind enters through the back of the oven. For Outdoor Use Only.
PIZZA OVEN LOW HEAT ISSUES	 Low or out of propane. Longer preheat required. Regulator flow limiting device (FLD) activated - due to improper lighting procedure or a leak. 	 Check propane level. Refill tank if low or out of propane. Preheat for 20 minutes. In colder climates more time may be required. Follow the regulator reset instructions on page 13, and perform the leak test instructions on page 14.

TROUBLESHOOTING

PROBLEM	POSSIBLE CAUSE	PREVENTION / SOLUTION
FLARE-UP INSIDE PIZZA OVEN	 When pizza toppings and/or sauce fall onto the pizza stone or come in contact with the rear heat shield a flare- up can occur. Oven temperature too hot. Excess flour on the cooking surface. 	 Avoid allowing sauce and pizza toppings to fall onto the pizza stone and avoid launching your pizza too far back on the pizza stone. If a flare up occurs, simply use your pizza peel to remove the pizza and wait for it to burn off. When the oven is OFF/'0' and has cooled, follow the cleaning instructions on page 30-31. Following preheat on 'MAX', adjust pizza oven temperature lower, if required. When the Pizza Stone has cooled, brush away any excess flour from the cooking surface and adjust the amount of flour being used on your pizza peel.
FLASHBACK FIRE (MELTED CONTROL KNOB/ FIRE AT CONTROL KNOB)	Burner venturi tube has a spider web or other blockage that is stopping the flow of gas into the burner.	Turn gas control knob OFF/ '0'. Close the LP cylinder and disconnect regulator. Clean the burner venturi tubes.
MY PIZZA STONE IS DISCOLORED	The pizza stone will bake on and burn excess flour, sauces and toppings that fall onto the surface and become burnt, darkening the pizza stone.	The Pizza Stone will change color but this will not affect performance. Baked on food, ash and debris can be brushed off with a a long handle scraper or brush when the oven is not in use, cool and 'OFF'. For a more thorough cleaning, when the oven is not in use, cool and 'OFF', remove and turn over the pizza stone and reposition. Preheating the pizza oven on high will allow all debris to be burned off.
LOUD ROARING SOUND WHEN THE OVEN IS LIT	The gas burner has not lit correctly.	Turn the control knob to the OFF/ "0" position. Wait 5 minutes before relighting. Always follow the proper lighting procedure to avoid potentail safety risks.

WARRANTY AND SERVICE

BEFORE YOU CALL FOR SERVICE HAVE THE FOLLOWING INFORMATION AVAILABLE:

- 1. **Serial number:** Located on the CSA rating label.
- 2. **Model number:** The model number is located on the front cover of this manual and the bottom right corner of the rating label.
- 3. Proof of purchase by the original owner.

Call the Customer Care Hotline 1-833-454-0864 Hours: 9AM- 7PM EST Mon-Sat, Closed Sunday

IF YOUR PRODUCT IS DAMAGED:

- Call the MEMBER's Mark Customer Care Hotline 1-833-454-0864.
- 2. DO NOT return to the store for replacement of damaged or defective parts. Member's Mark Customer Care will ensure that all in-stock replacement parts arrive at your home within 3-10 business days.
- 3. Concealed Loss or Damage: If damage is unnoticed until merchandise is unpackaged, resolve issue by contacting Customer Care immediately. Missing or damaged parts should be claimed within 30 days of purchase.

LIMITED WARRANTY:

Winners Products, hereby warrants to the **ORIGINAL PURCHASER** of this Member's Mark Gas Pizza Oven that will be free of defects in workmanship, from the date of purchase, for the period of the warranty, as outlined below. Please see Limitations and Exclusions section on the following page.

Member's Mark warrants that components in your new Member's Mark Gas Pizza Oven will be free of defects in material and workmanship from the date of purchase, for the following period:

LIMITED 1 YEAR: ALL PARTS

This product is covered by the Sam's Club Member Satisfaction Guarantee. Please visit samsclub.com for more information.

⚠ CAUTION: Some parts may contain sharp edges—especially as noted in the manual! Wear protective gloves if necessary. For residential use ONLY. DO NOT use for commercial cooking.

MARNING: DO NOT attempt to repair or alter the hose/valve/regulator for any assumed defect or for any type of retro fit or conversion. Any modifications to this assembly will void your warranty and create the risk of a gas leak and fire. Use only authorized replacement parts supplied by the manufacturer, for your model.

WARRANTY AND SERVICE

LIMITATION AND EXCLUSIONS

Winners Products Enginnering Ltd. has the following limitations to its warranty:

- This limited warranty is non-transferable and becomes void if used for commercial or rental purposes. Which includes (but not limited to): Restaurants, hotels, resorts, time shares or rental properties.
- 2. This warranty applies only when pizza oven is used in the United States.
- Warranty is in lieu of all warranties, expressed or implied, and all other obligations or liabilities related to the sale or use of its barbecue products.
- 4. Winners Products Engineering Ltd. Is not responsible for any misuse outside of the directions listed in the manual.
- 5. Winners Products Engineering Ltd. will repair or replace parts, at its option, proven defective under normal use and service and which on examination during the applicable warranty period (See exclusions to warranty coverage below).
- 6. Shipping and handling charges are the responsibility of the original consumerpurchaser for all in/out of warranty part orders.
- This limited warranty will not reimburse for the cost of any consequential losses, including (but not limited to) inconvenience, food, personal injury, expenses for travel, transportation or property damage.
- 8. Winners Products Engineering Ltd. does not authorize any person or company to assume for it any other obligation or liability in connection with the sale, installation, use, removal, return, or replacement of its equipment; and no such representations are binding on Winners Products Engineering Ltd.
- $9. \ \ \, \text{The purchaser shall retain a copy of the purchase invoice for future claims.}$
- 10. Winners Products Engineering Ltd. does not provide warranty whatsoever in respect to accessories, or parts not supplied with original purchase.
- 11. Claims must be made within the duration of the period of coverage. Winners Products Engineering Ltd will not retroactively cover claims outside of the coverage period, even if the issue arose within the said period. It is the responsibility of the purchaser to establish warranty period with the date from the original sales receipt.

12. Winners Products Engineering Ltd. reserves the right to make changes or improvements to products it produces in the future without imposing on itself any obligations to install the same improvements in the products it has previously manufactured.

Winners Products Engineering Ltd. excludes from its warranty, the following:

- a. Failure to perform regular maintenance, safety checks and service, including (but not limited to) removal of insects from venturi tubes, resulting in a flashback fire, damage caused by grease fires, flare-up fires or fires resulting from improper connection of hose to gas source.
- b. Part failure due to lack of cleaning and maintenance, part failure due to use of improper cleaning products, such as indoor stainless-steel cleaners, abrasive and chemical cleaners, porcelain oven cleaner and other chemical cleaners which can cause damage to surfaces.
- c. Normal wear and tear, chipping and scratching on painted, porcelain enamel, stainless-steel or pizza stone, dents, discoloration caused by environment or heat, surface corrosion, rust or rust perforation, chemical exposure in the atmosphere and other damages which result with normal use.
- d. Accidental damage, abuse, tampering or misuse, misapplication, vandalism, careless handling, modifications, neglect, improper assembly or installation, environmental such as severe weather conditions or situations otherwise uncontrollable by the manufacturer.
- e. Damages caused by failure to follow proper usage, safety and maintenance instructions presented throughout this manual.

There are no other express warranties except as set forth herein and any applicable implied warranties of merchantability and fitness are limited in duration to the period of coverage of this express written limited warranty.

NOTES

NOTES

NOTES



Distributed by Sam's West Inc. 2101 SE Simple Savings Dr.Bentonville, Arkansas 72716-0745

Made in China Imported by Winners Products Engineering Ltd. 27/F Top Glory Tower 262 Gloucester Road, Causeway Bay, HONG KONG