



FEATURES

**Guy Ropes** - to support the canopy, attach guy ropes from guy out tabs to the anchor stakes in the ground (roughly at 45°).  
*Repeat this on remaining 3 corners.*

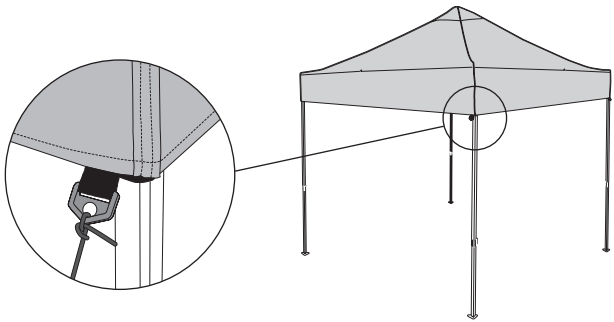

ROLL AWAY BAG INSTRUCTIONS



**(1)** Close your canopy and frame completely.  
**(2)** Unzip and place the roll away bag with wheels (UP) & over the top of the canopy.




**(3)** CAREFULLY, flip the roll away bag & canopy with frame upside-down (placing it on its side), and THEN lift upright.

**(4)** Fully, zip the roll away bag closed.

**(5)** Use the straps to wrap the roll away bag tightly.



**(6)** Roll away bag is designed to be pulled by the handle.



Store canopy in roll away bag.

PRODUCT INFORMATION:

- Do not use in any potentially windy or rainy weather. Wind and rain can damage your canopy and may also result in injury to you or others. Therefore, do not rely on canopy for protection in heavy or prolonged rain storms.
- This product is designed as a temporary sun canopy. Do not leave up for extended periods.
- Always stake or weigh down your canopy.
- Use caution when handling the canopy’s frame. Avoid pinching hands or fingers as frame opens or closes.
- Do not use canopy in a lightning storm.
- Do not leave your canopy unattended.
- Do not build fires under canopy.

PRODUCT CARE/MAINTENANCE:

For long lasting durability and the best possible protection for your canopy, follow these care and maintenance instructions:

- Use a mild soap (not detergent) and plenty of water for top cleaning.
- Let the canopy top and frame dry completely before closing or storing to avoid mildew.
- The canopy frame will operate and look better if occasionally wiped with silicone spray, especially before and after use in damp conditions. Remove excess silicone residue before attaching top.
- Slightly tighten bolts if frame becomes loose.



We are so confident you will be delighted with your Member’s Mark purchase that we promise to refund or replace any item you find unsatisfactory. We aim to delight all customers and would love to hear about your discoveries! Call us at: **1-888-301-0332** (toll-free), 8 am - 5 pm CST Monday - Friday.

**WARNING!**  
**KEEP ALL FLAME AND HEAT SOURCES AWAY FROM ALL PRODUCT FABRICS.**  
THESE PRODUCTS ARE MADE WITH FLAME RESISTANT FABRIC WHICH MEETS CPAI-84 SPECIFICATIONS. **IT IS NOT FIREPROOF.** THE FABRIC WILL BURN IF LEFT IN CONTINUOUS CONTACT WITH ANY FLAME SOURCE.



**MEMBER’S MARK™**  
**Sam’s West, Inc.**  
Bentonville, Arkansas U.S.A.  
**www.SamsClub.com**



**MEMBER’S MARK™**

**USER MANUAL**  
**10’x10’ COMMERCIAL CANOPY**  
(3.05m x 3.05m)



**PARTS**

- (1) Aluminum and Steel Hybrid Frame
- (1) 600D Polyester Top with Grommets and Guy Out Tabs
- (4) 150D Polyester Zipper Side Walls
- (4) Canopy Anchor Stakes
- (4) Guy Rope Anchor Stakes
- (4) Guy Ropes
- (1) Oxford Roll-Away Carry Bag


**READ THIS INFORMATION BEFORE PROCEEDING.**  
**IT IS THE USER’S RESPONSIBILITY TO TAKE THE FOLLOWING PRECAUTIONS AT ALL TIMES.**




## 10'x10' COMMERCIAL CANOPY

### INITIAL SET UP

(1) With partner, grasp 2 outer legs, slightly lift off the ground, and step backwards - stopping at full arms' length.




(2) Unfold the polyester top and place it over the open frame.



**Hook & Loop Fasteners**



(3) Secure the polyester top to the frame by attaching the hook & loop fasteners on the top with the hook & loop fasteners on the frame. Pull the corners down fully.

(4) Unscrew top attachment nut from (bolt – on frame). Line up fabric top through grommets onto each bolt, then screw on attachment nut and tighten until snug. Fabric top should rotate easily - DO NOT OVER TIGHTEN.

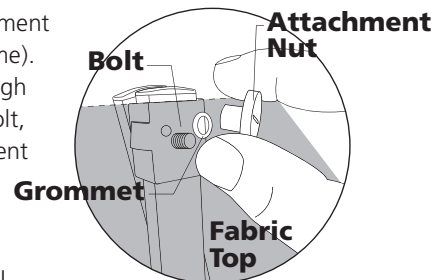



### CANOPY SET UP

(1) With partner on opposite side of canopy, place your frame in the center of area to be shaded. Grasp outer legs, lift off the ground, and step backwards - stopping at full arms' length.

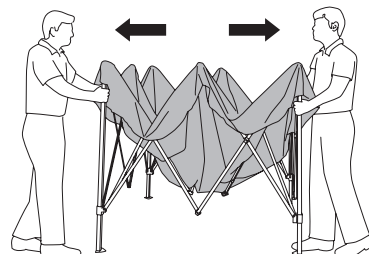


(2) Grasp the top and bottom of the truss on opposite sides. Slightly lift canopy up and PUSH hands together while stepping backwards until canopy is fully opened. Be careful not to pinch fingers or push too hard so as to avoid damage to truss.

(3) To lock in the slider at each corner, first lift the fabric off the slider, then with one hand hold the top of the leg while pushing up on the slider with the other hand. The PUSH BUTTON will engage. Repeat this on remaining 3 corners.




(4) With partner, lift outer legs up and slide out the inner legs until the PUSH BUTTON locks into outer legs. Repeat this on remaining 2 legs.

**HEIGHT ADJUSTMENT –**  
Use push button to adjust legs to desired height. Repeat on opposite legs.





### CANOPY TAKE DOWN


(1) With partner, press the PUSH BUTTONS and lower the canopy. Repeat this on remaining 2 legs.



(2) Press the push buttons and release all 4 corner-sliders to collapse the frame.



(3) With partner on opposite side, grasp top and bottom area of trusses. Slightly lift canopy up and PULL hands apart while stepping towards your partner until canopy is 3/4 closed.



(4) With each partner grasping 2 outer legs, push frame together to fully close it. Be careful not to pinch fingers!

Store canopy in roll away bag.


### SIDE WALL SET UP



## 10'x10' COMMERCIAL CANOPY SIDE WALLS

#### SIDE WALLS (Inward/Outward)

(1) Lower your canopy to the lowest setting to attach each side wall to the frame. Determine which side wall will be facing inward and what side should be facing outward.




- Inward Side Wall  
(middle) has SMALL TIE STRAPS.



- Outward Side Wall  
(middle) has LARGE BUTTON STRAPS

#### SIDE WALLS

The side wall will be placed on each corner so that half of the wall is on 2 sides.

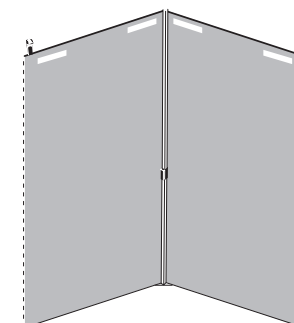


#### IMPORTANT


When enclosing your canopy by zipping up all 4 side walls, it is strongly recommended the canopy be weighted down and secure to avoid wind damage. Carefully read and follow the instructions provided with this product.

#### ATTACHING SIDE WALLS

(2) Attach each "side wall to the canopy" by pressing the side wall hook & loop fastener to the hook & loop fastener inside the valance of the canopy. Now, hook the elastic strap around metal truss.



After the hook & loop fasteners are secure, tie the small tie straps on the inward side wall to the walls.

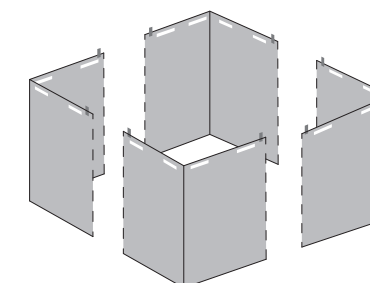

#### (3) ENCLOSING THE CANOPY

To fully enclose your canopy, zip the side walls together at the middle of each side of the frame.

#### (4) CORNER CURTAINS

To turn your walls into corner curtains, unzip each side and gather the material into the corner. Using the large button strap, secure the material around the leg of your canopy. Repeat this on remaining 3 corners.

